


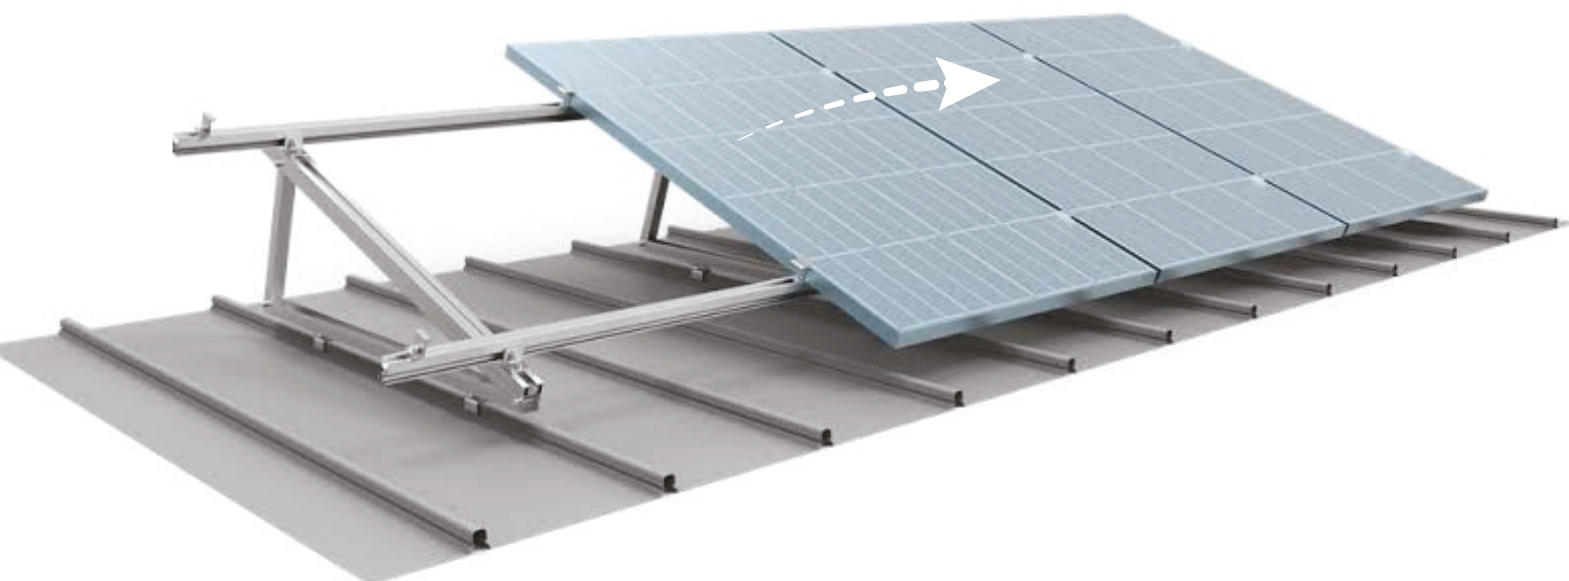

Universal Rapid Solar Mounting System (with Tile Hook)

-  Creative clamp mount by push into rails directly.
-  Special clamp clip could offer adjustable height.
-  Fast and simple installation, precise adjust height for roofs.


Parameters

Material : AL6005-T5, SUS304 / SUS410	Applicable module thickness: 30mm-40mm
Surface treatment: Anodized	Adjustable height of hook: 37mm
Module: Framed	Warranty: 10 years


Components



L-Foot



Rail



Rail Splice



Mid y End Clamp



Rail Conector



Hanger Bolt



Rear Leg



Grounding Lug